





## Parts Included:

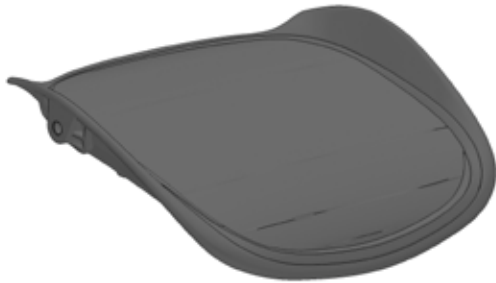


Seat

## Tools Required:




Wrench 10 mm




T27 Torx Driver



6mm Drill Bit




M6 Hex Bit



Torque Wrench


## Steps:

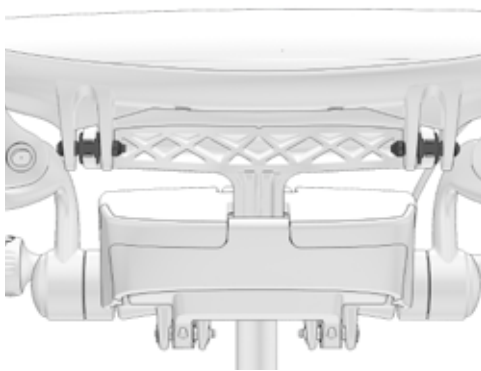


1. Remove shoulder bolt and nut.




2. Use torx driver and 10mm wrench.

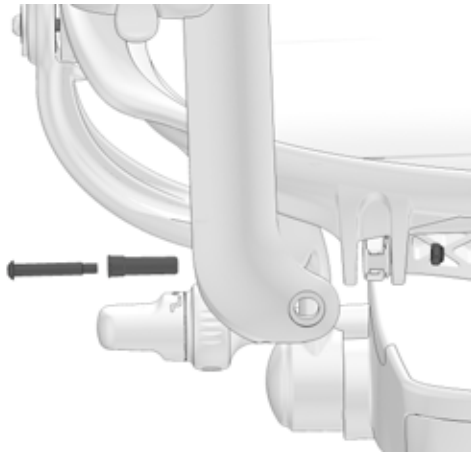

3. Follow previous steps to remove other side shoulder bolt and nut.

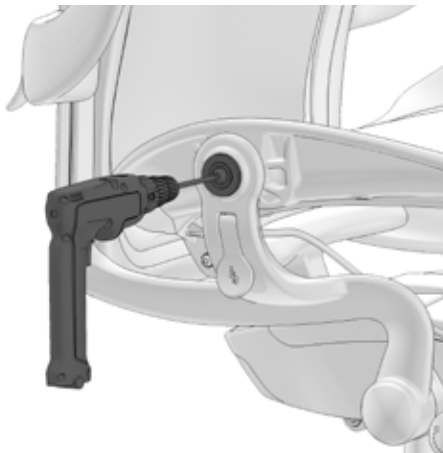

4. Use 6mm drill to remove the bolt from the swing arm.

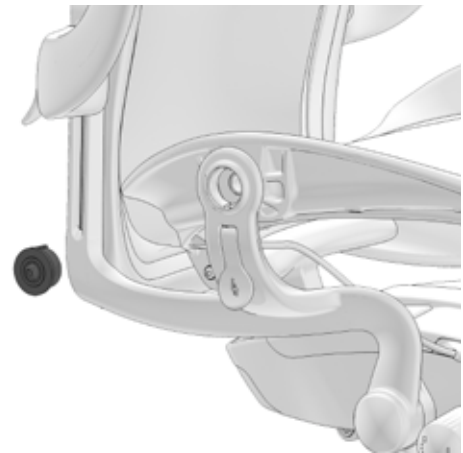



5. Remove the other side bolt to detach the seat



6. Detach the seat.

---


## Re-Assembly Steps:



7. Replace the new seat in place.




8. Install bolts on both side.

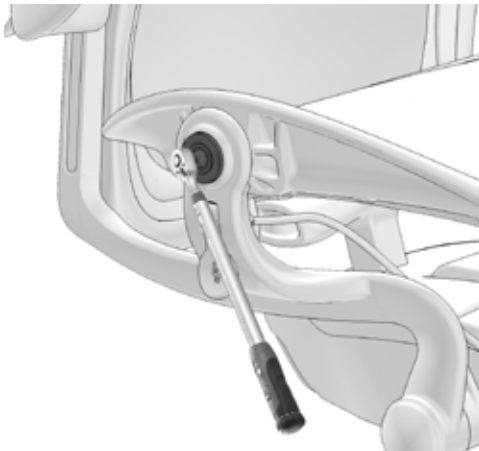

9. Use torque wrench and 6mm hex bit. Torque each bolt to 250 in-lbs.



10. Install shoulder bolt and nut.

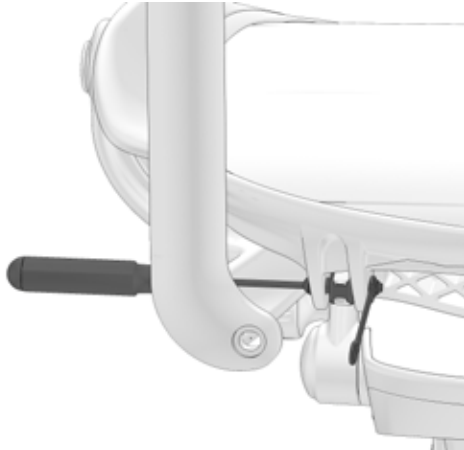

11. Use T27 torx driver and 10mm wrench to install shoulder bolt and nut.



12. Install shoulder bolt and nut on both side.